

Cisco 8-Port Channelized T1/E1 Shared Port Adapter Version 2

The Cisco® 8-Port Channelized T1/E1 Shared Port Adapter (SPA) Version 2 takes advantage of the Cisco I-Flex approach, which combines shared port adapters and SPA interface processors (SIPs). This extensible design helps prioritize data, voice, and video services. Enterprise and service provider customers can take advantage of improved slot economies, which result from modular port adapters that are interchangeable across Cisco routing platforms. The I-Flex design increases connectivity options and offers superior service intelligence through programmable interface processors that can deliver line-rate performance. I-Flex enhances speed-to-service revenue and provides a rich set of quality of service (QoS) features for premium service delivery, while effectively reducing the overall cost of ownership.

Figure 1. Cisco 8-Port Channelized T1/E1 Shared Port Adapter Version 2



Product Overview

Today's global enterprise and service provider networks require diverse networking solutions to meet both economic and evolving connectivity needs. The demand for high-density, cost-effective solutions increases as corporate intranets expand to include more regional offices and increased numbers of remote and mobile users.

The Cisco 8-Port Channelized SPA T1/E1 Version 2 (Figure 1) provides one of the greatest densities currently available in the industry at 8 ports per SPA and up to 32 ports per SIP. The cost per T1 or E1 port is less than that of a standard serial port with external channel service unit (CSU) or data service unit (DSU), which makes the Cisco 8-Port Channelized T1/E1 SPA Version 2 cost-effective for all WAN connectivity.

This SPA is designed to provide a full 8-port channelized solution for Cisco 6500 Series, 7600 Series, ASR1000 Series, ASR9000 Series and 12000 Series Routers. The interfaces can be channelized, fractional, or unframed (E1) with up to 256 independent High-Level Data Link Control (HDLC) channels definable for T1 and E1 applications. With these capabilities, the Cisco 8-Port Channelized SPA T1/E1 Version 2 eliminates the need for separate interface types for separate connection requirements.


Multilink Point-to-Point Protocol (MLPPP) is supported in hardware to allow link aggregation greater than T1 capacity. Up to eight individual T1s can be combined within a multilink bundle that appears to be a single IP link. As a result, service providers can provision greater-than-T1 bandwidth incrementally, without migrating the circuit and customer premises equipment (CPE) infrastructure to T3 facilities.

The Cisco 8-Port Channelized T1/E1 SPA Version 2 is hot-swappable and supports service-transparent online insertion and removal (OIR), allowing removal of the adapter without affecting the interface processor and other SPAs.

Applications

The Cisco 8-Port Channelized T1/E1 SPA Version 2 is ideal for service providers and large enterprises that want to cost-effectively deploy high-density terminations for multiple remote sites (Figure 2). The SPA helps enable applications that need to terminate remote and branch-office locations on a single router in a corporate enterprise network. For service provider applications where only DSU functions are required (for example, at sites colocated with a carrier), the Cisco 8-Port Channelized T1/E1 SPA Version 2 provides high port density at a reduced cost per port. For E1 applications, the channelized E1/G.703 interface allows direct connectivity to 120-ohm G.703 lines.

Figure 2. High-Density Termination for Multiple Remote Sites

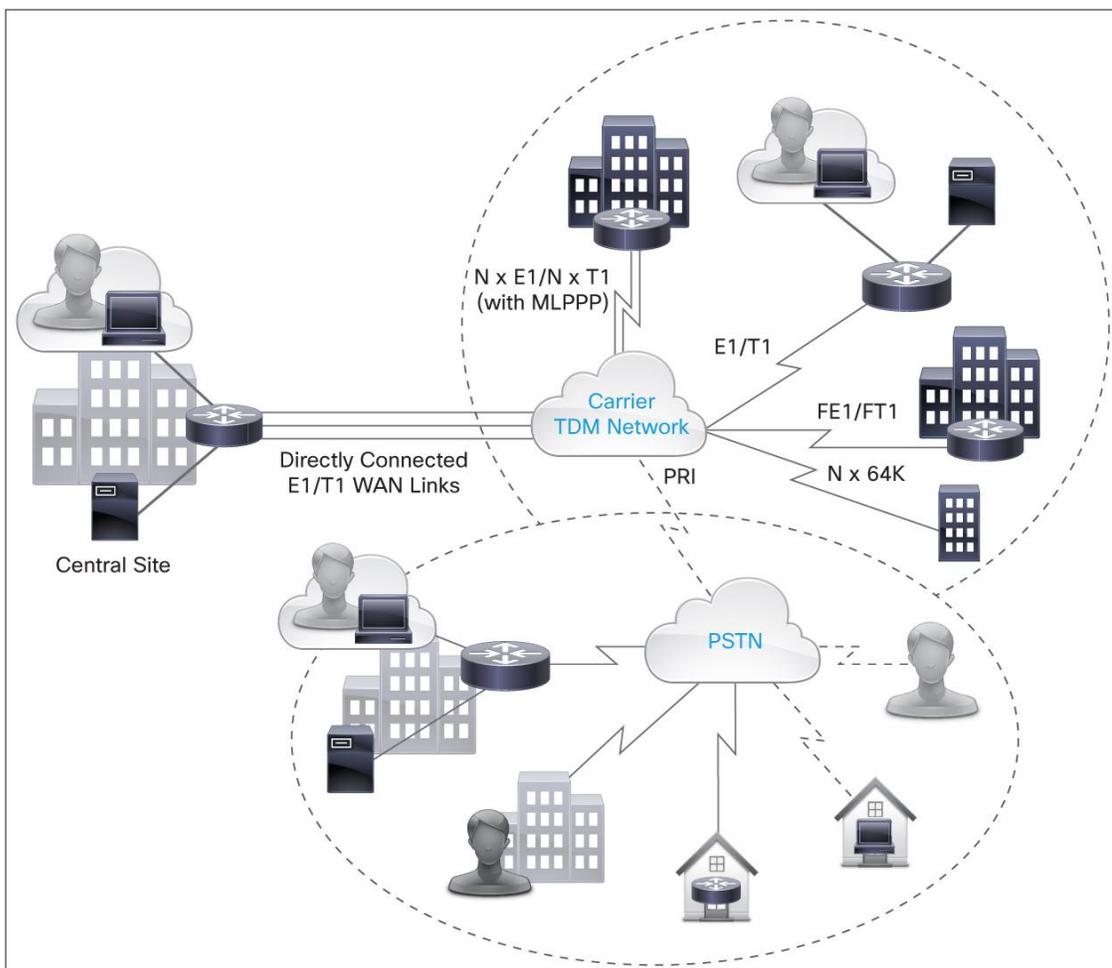

Features and Benefits

The Cisco 8-Port Channelized T1/E1 SPA Version 2 offers many advantages, including:

- Eight software-configurable T1 or E1 ports
- Support for channelized and fractional T1 and E1, as well as clear channel E1
- 256 independent HDLC channels
- Integrated CSUs and DSUs
- Support for all major encapsulations, including MLPPP and multilink Frame Relay (MLFR)
- Support for link fragmentation and interleaving (LFI) over Frame Relay and MLPPP

The Cisco SPA and SIP portfolio offers the following additional advantages:

- Modular, flexible, intelligent interface processors
 - Superior flexibility, supporting a combination of interface types on the same interface processor for consistent services, independent of access technology
 - Pioneering programmable interface processors that provide flexibility for the service diversity required in next-generation networks
 - Innovative design that supports intelligent service delivery without compromising on performance
- Increased speed-to-service revenue
 - The scalable, programmable Cisco architecture extended to 10 Gbps significantly improves customer density, increasing potential revenue per platform.
 - Interface breadth (copper, channelized, POS, ATM, and Ethernet) on a modular interface processor allows service providers to roll out new services more quickly, helping ensure that all customers, large and small, receive consistent, secure, and guaranteed services.
 - High-density Small Form-Factor Pluggable (SFP) interfaces are featured for high-port-count applications with reach flexibility. Future optical technology improvements can be adopted using existing SPAs.
- Improved return on your routing investment
 - Improved slot economies and increased density help reduce capital expenditures (CapEx).
 - The ability to easily add new interfaces as they are needed facilitates a "pay-as-you-grow" business model.
 - SPAs are shared across multiple platforms and can be moved easily from one to another, providing consistent feature support, accelerated product delivery, and a significant reduction in operating expenses (OpEx) through common sparing as service needs change.

Product Specifications

Table 1 gives specifications of the Cisco 8-Port Channelized T1/E1 SPA Version 2.

Table 1. Product Specifications

| Features | Descriptions |
|---------------------------------|--|
| Product compatibility | <ul style="list-style-type: none"> Cisco 7600 Series Routers Cisco XR 12000 Series Routers Cisco ASR 1000 Series Aggregation Services Routers Cisco ASR 9000 Series Routers |
| Minimum software version | <ul style="list-style-type: none"> Cisco 7600 Series Routers - Cisco IOS® 15.4(1)S Cisco XR 12000 Series Routers - Cisco IOS XR 5.1.1 Cisco ASR 1000 Series Router - Cisco IOS XE 3.10.1 Cisco ASR 9000 Series Router - Cisco IOS XR 5.1.1 |
| Port density per SPA | 8 ports |
| Physical interface | <ul style="list-style-type: none"> • RJ-45 connector • RJ-45 to BNC adapter cable option |
| Protocols | <p>Encapsulation protocols:</p> <ul style="list-style-type: none"> • HDLC • Point-to-Point Protocol (PPP), RFC 1662 • Frame Relay, RFC 1490 <p>Multilink support:</p> <ul style="list-style-type: none"> • MLPPP, RFC 1990 • MLFR, FRF.16 • LFI over Frame Relay (FRF.12) and MLPPP |
| Features and functions | <ul style="list-style-type: none"> • Up to 8 independent T1 or E1 ports configurable as either all T1 or all E1 only • Full-duplex connectivity • Channelized and fractional T1/E1, clear channel E1 supported • Up to 256 usable n x 64K, where n is 1 to 24 for T1 and 1 to 32 for E1 • Line-rate performance for all ports channelized to DS-0 • Integrated CSUs and DSUs • Internal or network clocking selectable on each port • Per-port, dual-color status LED • Loopback capabilities: <ul style="list-style-type: none"> ◦ Local and remote loopback at the T1 and E1 level ◦ Response to embedded loopback commands ◦ Insertion of loopback commands into transmitted signal ◦ N x DS-0 system-side loopback • Bit-error-rate-testing (BERT) pattern generation and detection per channel (maximum of 6 T1/E1 at a time) <ul style="list-style-type: none"> ◦ Programmable pseudorandom pattern up to 32 bits long, including all 0s, all 1s, 211, 215, 220, 220 Quasi-Random Signal Sequence (QRSS), 223, alternating 0s and 1s, 1-in-8, and 3-in-24 ◦ 32-bit error-count and bit-count registers ◦ Fully independent transmit and receive sections ◦ Detection of test patterns with bit error rates up to 10⁻² • 24-hour history maintained for error statistics and failure counts, at 15-minute intervals • 16- and 32-bit cyclic redundancy check (CRC); 16-bit default |

| Features | Descriptions |
|-------------------------------------|--|
| T1-specific features | <ul style="list-style-type: none"> • Data rate to 1.536 Mbps per port • Impedance: 100 ohms • D4 Super Frame (SF) or Extended Super Frame (ESF) framing • Alternate mark inversion (AMI) or binary 8-zero substitution (B8ZS) line encoding • ANSI T1.403 and AT&T TR 54016 Facility Data Link (FDL) • Selectable T1 cable length in increments from 0 to 655 feet • Selectable T1 CSU line build-out (LBO): 0, -7.5, -15, and -22.5 dB • Selectable T1 CSU receiver gain: 26 or 36 dB • Alarm monitoring: <ul style="list-style-type: none"> ◦ Alarm indication signal (AIS) ◦ Out of frame (OOF) ◦ Far-end alarm failure (yellow or distant alarm) • Performance data collection: <ul style="list-style-type: none"> ◦ CRC and bit errors ◦ Framing bit errors ◦ Line errored seconds ◦ Far-end errored seconds ◦ Far-end severely errored seconds ◦ Far-end unavailable seconds ◦ Line coding violation (LCV) |
| E1-specific features | <ul style="list-style-type: none"> • Data rate to 2.048 Mbps (unframed mode) or 1.984 Mbps (framed mode) per port • Impedance: 120 ohms (RJ-45 to BNC adapter cable offers 75-ohm configuration option) • Unframed E1, CRC4, or non-CRC4 framing • High-density bipolar with three zeroes (HDB3) line encoding • Alarm monitoring: <ul style="list-style-type: none"> ◦ AIS ◦ OOF ◦ Remote alarm indication (RAI) • Performance data collection: <ul style="list-style-type: none"> ◦ CRC and bit errors ◦ Framing bit errors ◦ Far-end block error (FEBE) ◦ LCV |
| Reliability and availability | <ul style="list-style-type: none"> • OIR • Single SPA software reset |
| MIBs | RFC 1406 MIB |
| Network management | Simple Network Management Protocol (SNMP) |
| Physical specifications | <ul style="list-style-type: none"> • Weight: 0.75 lb (0.34 kg) • Height: 0.8 in. (2.03 cm) (single height) • Width: 6.75 in. (17.15 cm) • Depth: 7.28 in. (18.49 cm) • Power 9.4W maximum |

| Features | Descriptions |
|--|--|
| Compliance and agency approvals | CE Marking Safety <ul style="list-style-type: none"> • UL 60950 • CSA 22.2 No.60950 • IEC 60950 • EN 60950 • AS/NZS 3260 • TS001 EMC <ul style="list-style-type: none"> • CFR47 • Part 15 • ICES 003 • EN55022 • CISPR 22 • AS/NZ 3548 • VCCI • EN55024 • EN50082-1 • EN61000-6-1 Telecom (T1) <ul style="list-style-type: none"> • ANSI T1.403 Telecom (E1) <ul style="list-style-type: none"> • ITU G.703 • G.704 • G.706 |
| Environmental specifications | <ul style="list-style-type: none"> • Operating temperature: 41 to 104°F (5 to 40°C) • Storage temperature: -38 to 150°F (-40 to 70°C) • Operating humidity: 5 to 85% relative humidity • Storage humidity: 5 to 95% relative humidity |

Ordering Information

To place an order, visit the [Cisco Ordering Home Page](#) and refer to Table 2 for ordering information.

Table 2. Ordering Information

| Product Name | Part Number |
|---|-------------------|
| Cisco 8-Port Channelized T1/E1 Shared Port Adapter Version 2 | SPA-8XCHT1/E1-V2 |
| Cisco 8-Port Channelized T1/E1 Shared Port Adapter Version 2 | SPA-8XCHT1/E1-V2= |
| Adapter Cable - converts 75 ohms to 120 ohms | CAB-ADPT-75-120 |

Service and Support

Cisco offers a wide range of services programs to help accelerate customer success. These innovative services programs are delivered through a unique combination of people, processes, tools, and partners, promoting high levels of customer satisfaction. Cisco services help you protect your network investment, optimize network operations, and prepare your network for new applications to extend network intelligence and the power of your business.

For More Information

For more information about the Cisco SPA and SIP portfolio, visit <http://www.cisco.com/go/spa> or contact your local Cisco account representative.

For more information about Cisco Services, refer to [Cisco Technical Support Services](#) or [Cisco Advanced Services](#).



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at www.cisco.com/go/offices.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)