


Lembar data produk

Spesifikasi

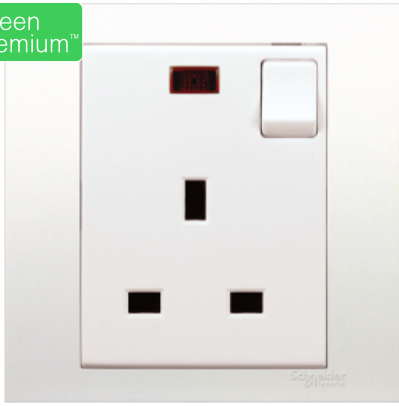

13A 250V 1 Gang Switched Socket with Neon

KB15N

Main

Range	Vivace
Product or component type	Switched socket
Device short name	KB15
Device application	Power supply
Device presentation	Complete product
Switch application	On/off switching
Main colour tint	White
Colour tint	White

Complementary

Pilot light	Red neon indicator
Outlet poles configuration	2P + E
Number of gangs	1 gang
	White
Material	Polycarbonate: grid plate Polycarbonate: surround Polycarbonate: base
Projecting depth	8 mm
Device mounting	Flush
Mounting support	Wall mounted
Fixing mode	By screw M3.5
Fixing center	60.3 mm
Embedding depth	22.0 mm
Rated current	13 A at 250 V AC, resistive
Network frequency	50/60 Hz
Contacts material	Brass and phosphor bronze
Connections - terminals	Pillar terminal
Terminal identifier	N L Earth
Tightening torque	0.4 N.m

Clamping connection capacity	2 x 4 mm ² 3 x 2.5 mm ²
Width	87 mm
Height	87 mm
Depth	35 mm

Environment

Standards	BS 1363 SS 145 MS 589
Ambient air temperature for operation	0...40 °C
Ambient air temperature for storage	-5...60 °C
Relative humidity	0...95 %
Operating altitude	<= 2000 m
Environmental characteristic	Indoor use
IP degree of protection	IP20

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	111.25 g

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope)
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile

Contractual warranty

Warranty	12 months
-----------------	-----------

Penggantian yang disarankan