


Lembar data produk

Spesifikasi

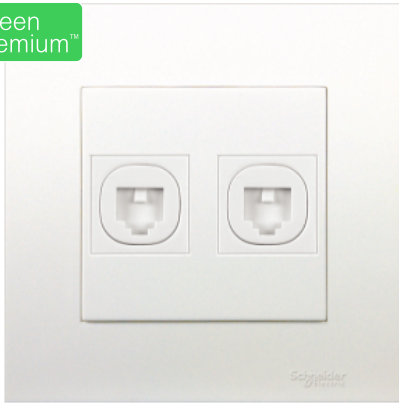

2 Gang Telephone Outlet with Shutter

KB32TS

Main

Range of product	Vivace
Range	Vivace
Device short name	KB32
Product or component type	Telephone socket
Device presentation	Complete product
Telephone socket type	RJ11 (8 contacts)
Colour tint	Wall: white

Complementary

Number of gangs	2 gangs White
Connector type	M-110 keystone 8 RJ11 connector
Material	Polycarbonate: surround Polycarbonate: grid plate Polycarbonate: base
Projecting depth	8 mm
Type of cable	2 pairs
Device mounting	Flush
Fixing mode	By 2 screws
Mounting support	Wall mounted
Fixing center	60.3 mm
Surface treatment	Untreated
Embedding depth	28 mm
Surface finish	Untreated RJ11 (8 contacts)
Connections - terminals	Clamp terminal
Tightening torque	0.4 N.m
Width	87 mm
Height	87 mm
Depth	35 mm

IP degree of protection	IP20
Main colour tint	White

Environment

Standards	IEC 60670-1
Ambient air temperature for operation	-5...40 °C
Ambient air temperature for storage	-5...40 °C
Relative humidity	0...95 %
Operating altitude	0...2000 m
Environmental characteristic	Indoor use IP20

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.2 cm
Package 1 Width	8.6 cm
Package 1 Length	8.6 cm
Package 1 Weight	90.99 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	15 cm
Package 2 Width	19 cm
Package 2 Length	10 cm
Package 2 Weight	980 g
Unit Type of Package 3	CAR
Number of Units in Package 3	100
Package 3 Height	21 cm
Package 3 Width	31.5 cm
Package 3 Length	50 cm
Package 3 Weight	9349 g

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile

Contractual warranty

Warranty 18 months

Penggantian yang disarankan