

Features :

1. High Quality construction and design.
2. 19" Standard installation.
3. High secure with handle front & rear door.
4. Glass front door and perforated rear door with hexagon perforated.
5. Removable dual side panel with locking system.
6. Cable entry at the top cover and bottom panel with brush panel.
7. Removable side panels for ease of installation and service access.
8. Grounding cable supported.
9. Modular fan panel include the fans which ease installation for maximize airflow system..
10. Include : adjustable leveling feet and castor.
11. Include : cable ring & fixed shelf.
12. Include : fan, cage nut & PDU.
13. Delivery in assembly or disassembly.

Specification Closed Rack - Glass Front Door					
Part Number	Size	Width (mm)	Height (mm)	Depth (mm)	Weight (kg)
AR-C20-600-GB	20U	600	1080	600	53
AR-C20-900-GB	20U	600	1080	900	79
AR-C20-1150-GB	20U	600	1080	1150	106
AR-C30-900-GB	30U	600	1520	900	95
AR-C30-1150-GB	30U	600	1520	1150	123
AR-C42-600-GB	42U	600	2050	600	83
AR-C42-900-GB	42U	600	2050	900	111
AR-C42-1150-GB	42U	600	2050	1150	139

Key benefits :

● Color : RAL9004 Black

kg Max Static Load 800kg



Handle Front & Rear w/ Hexagon Vented




Dual side panel w/ locking system



Modular Fan & Brush panel



Glass front door Top & bottom vented

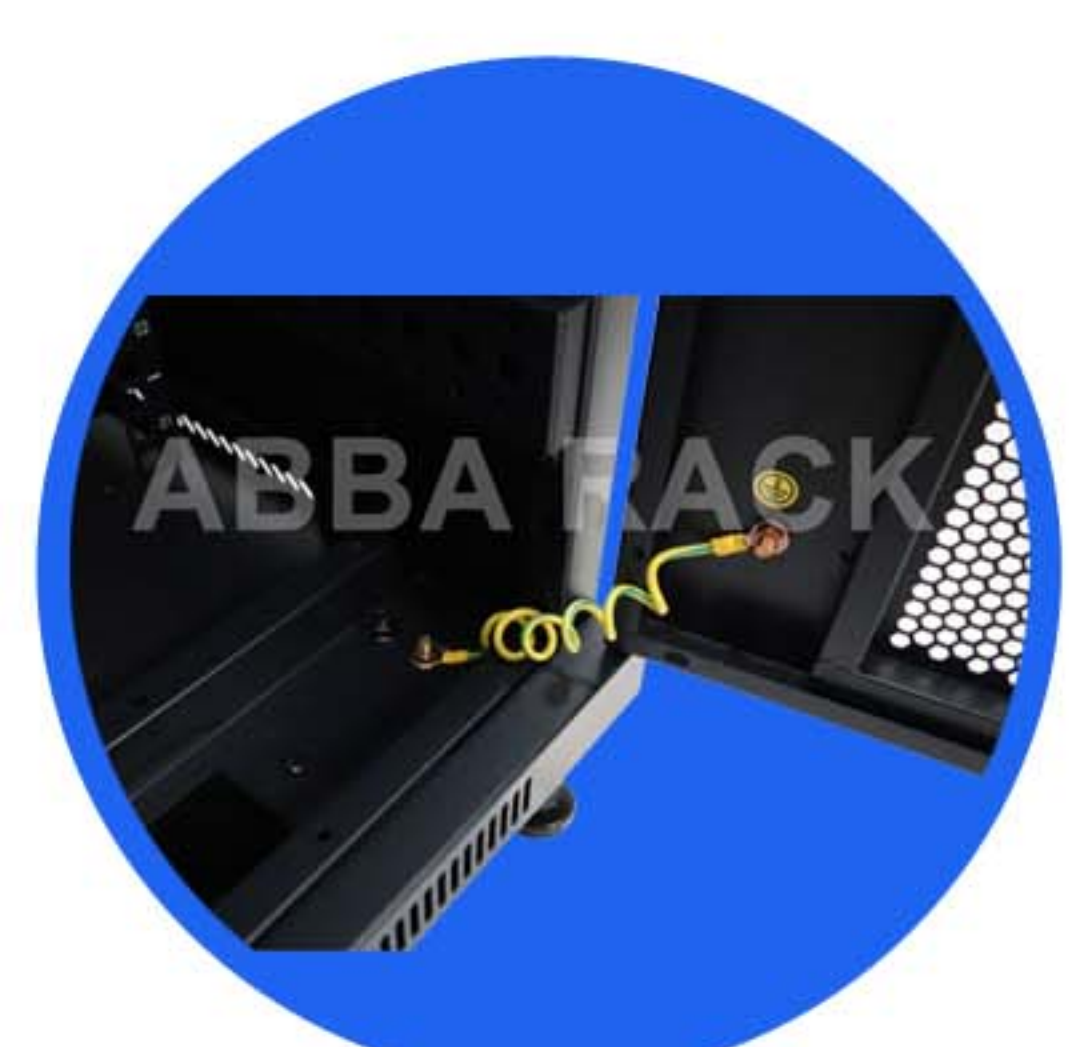

Grounding cable