



Layar LCD

VX3268-2KPC-MHD


Fitur Utama

- 1500R curved screen for a perfect balance of immersion and comfort
- 144Hz refresh rate ensures clarity in motion
- 1ms (MPRT) response time ensures smooth images
- AMD FreeSync™ Premium prevents screen tearing
- QHD 1440p resolution for clear detail



Deskripsi Produk

With an ultimate immersive curved screen and 144Hz refresh rate, the ViewSonic VX3268-2KPC-MHD provides a stunning viewing experience. The monitor has been designed with a 1500R curved and borderless panel for an immersive experience. A high 144Hz refresh rate delivers clarity in motion while AMD FreeSync™ Premium, virtually eliminates screen tearing and stuttering for a fluid gaming experience. With 1ms MPRT response time, the monitor delivers smooth images without ghosting. The VX3268-2KPC-MHD is also equipped with ViewSonic's exclusive ViewMode™ presets, which offer user-customized game modes, including FPS, RTS and MOBA game settings. In addition, a DisplayPort and two HDMI inputs offer flexible connectivity for gameplay.

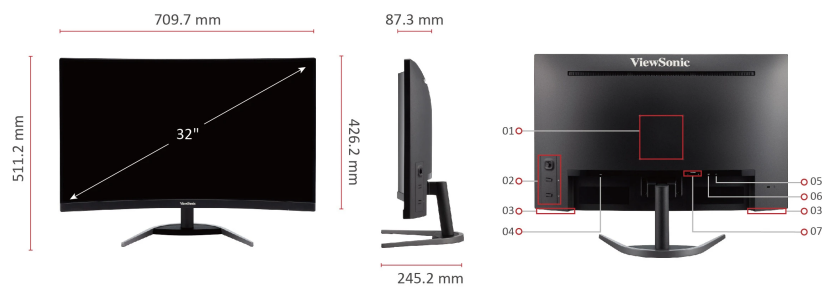

1. VESA Compatible (Wall Mount 100 x 100mm)
2. Menu Controls
3. Internal Speakers
4. AC In
5. Audio Out
6. DisplayPort
7. HDMI x 2

Kunjungi Kami

www.viewsonic.com

TAMPILAN

Display Size (in.):	32
Viewable Area (in.):	31.5
Jenis Panel:	VA Technology
Resolusi:	2560 x 1440
Jenis Resolusi:	QHD (Quad HD)
Rasio Kontras Statis:	3,000:1 (typ)
Rasio Kontras Dinamis:	80M:1
Sumber cahaya:	LED
Kecerahan:	250 cd/m² (typ)
Colors:	16.7M
Color Space Support:	8 bit (6 bit + FRC)
Aspect Ratio:	16:9
Response Time (MPRT):	1ms
Sudut Pandang:	178° horizontal, 178° vertical
Backlight Life (Jam):	30000 Hrs (Min)
Lengkungan:	1500R
Refresh Rate (Hz):	144
Variable Refresh Rate Technology:	FreeSync Premium
Filter Cahaya Biru:	Yes
Flicker-Free:	Yes
Color Gamut:	NTSC: 85% size (Typ) sRGB: 120% size (Typ)
Ukuran Piksel:	0.272 mm (H) x 0.272 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

KESESUAIAN

Resolusi PC (max):	2560x1440
Resolusi Mac® (maks):	2560x1440
Sistem Operasi PC:	Windows 7/8/8.1/10/11 certified; macOS tested
Resolusi Mac® (min):	2560x1440

KONEKTOR

3.5mm Audio Out:	1
HDMI 2.0:	2
DisplayPort:	1
Power in:	3-pin Socket (IEC C14 / CEE22)

AUDIO

Speaker Internal:	2Watts x2
-------------------	-----------

POWER

Mode Eco (Hemat):	39W
Eco Mode (optimized):	50W
Konsumsi (khas):	63W
Konsumsi (maks):	76W
Tegangan:	AC 100-240V
Stand-by:	0.5W
Sumber Daya listrik:	Internal Power Supply

PERANGKAT KERAS TAMBAHAN

Slot Kunci Kensington:	1
------------------------	---

KONTROL

Kontrol Fisik:	Joystick key: Up, Right, Down, Left, Center; Key 1 (favorite); Key 2 (power)
Pada Tampilan Layar:	Input Select, Audio Adjust, ViewMode, Color Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Suhu:	32°F to 104°F (0°C to 40°C)
Kelembaban (tanpa kondensasi):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

SINYAL INPUT

Frekuensi Horizontal:	30 ~ 255KHz
Frekuensi Vertikal:	48 ~ 144Hz

VIDEO INPUT

Sinkronisasi Digital:	TMDS - HDMI (v2.0), PCI-E - DisplayPort (v1.2)
-----------------------	--

ERGONOMIS

Miring (Maju / Mundur):	-3° / 21°
-------------------------	-----------

BERAT (IMPERIAL)

Net (lbs):	15.6
Bersih Tanpa Dudukan (lbs):	14
Gross (lbs):	21.1

WEIGHT (METRIC)

Net (kg):	7.1
Jaring Tanpa Dudukan (kg):	6.3
Gross (kg):	9.6

DIMENSI (IMPERIAL) (WXHxD)

Kemasan (in.):	31.5 x 20.7 x 7.3
Fisik (in.):	27.9 x 20.1 x 9.7
Fisik Tanpa Berdiri (masuk):	27.9 x 16.8 x 3.4

DIMENSI (METRIK) (WXHxD)

Kemasan (mm):	800 x 526 x 186
Fisik (mm):	710 x 511 x 245
Physical Without Stand (mm):	710 x 426 x 87

UMUM

Regulasi:	cTUVus, FCC-B, ICES003, CEC, TUV S-Mark, MX-CoC, Mexico Energy, REACH, WEEE, RCM
ISI PAKET:	VX3268-2KPC-MHD x1, 3-pin Plug (IEC C13 / CEE22) x1, DisplayPort Cable (v1.2; Male-Male) x1, Quick Start Guide x1
Daur Ulang / Pembuangan:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market