


ViewSonic® LAYAR LCD TD1630-3

Fitur Utama

- Advanced ergonomic stand for tilt or flat
- HDMI and VGA inputs
- Supports Windows® 7/8/10 and selected Linux
- 7H hardness screen
- Dual integrated speakers

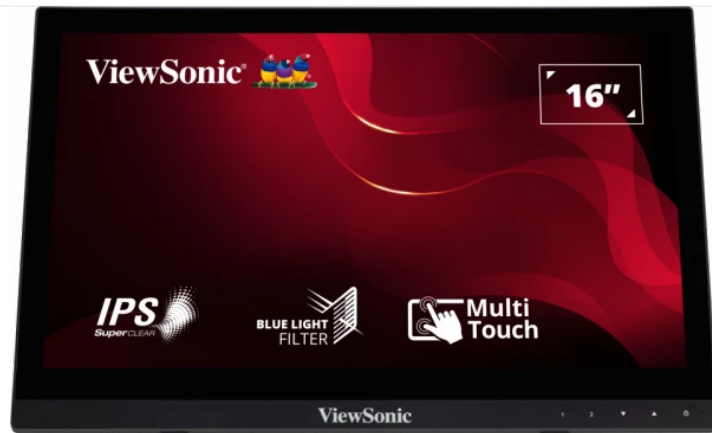

Deskripsi Produk

The ViewSonic TD1630-3 is a 16" (15.6" viewable) display with 10-point multi-touch functionality. With an advanced ergonomic design, the TD1630-3 can tilt or lay flat to give users maximum comfort. Delivering touchscreen versatility, this display offers fantastic flexibility for retail or business settings, while VGA and HDMI inputs provide ample connectivity. Compatibility with a wide range of operating systems, including Windows 10/11 and Linux versions*, along with dual integrated speakers, make this intuitive touchscreen a highly accurate, ultra-responsive touch experience that is ideal for interactivity in a retail or business settings.

*Supports Windows 7/8/10/11 , Linux Kernel 4.X/3.X



1. Internal Speakers
2. USB
3. DC In
4. VESA Compatible(Wall Mount 75x75mm)
5. VGA
6. HDMI

7. Earphone

Kunjungi Kami

www.viewsonic.com

TAMPILAN

Display Size (in.):	16
Viewable Area (in.):	15.6
Jenis Panel:	TN Technology
Resolusi:	1366 x 768
Jenis Resolusi:	WXGA (Wide XGA)
Rasio Kontras Statis:	500:1 (typ)
Rasio Kontras Dinamis:	10M:1
Sumber cahaya:	LED
Kecerahan:	190 cd/m ² (typ)
_Brightness (PCS):	190 cd/m ² (typ)
Colors:	262K
Color Space Support:	6 bit true
Aspect Ratio:	16:9
Response Time (Typical Tr+Tf):	12ms
Sudut Pandang:	90° horizontal, 60° vertical
Backlight Life (Jam):	15000 Hrs (Min)
Lengkungan:	Flat
Refresh Rate (Hz):	60
Filter Cahaya Biru:	Yes
Color Gamut:	NTSC: 45% size (Typ) sRGB: 67% size (Typ)
Ukuran Pksel:	0.252 mm (H) x 0.252 mm (V)
Layar sentuh:	Projected Capacitive, 10-point multi-touch
Surface Treatment:	Glossy, Hard Coating (7H)
Cover Glass Thickness:	0.83mm

KESESUAIAN

Resolusi PC (max):	1366x768
Resolusi Mac® (maks):	1366x768
Sistem Operasi PC:	Windows 7/8/8.1/10/11 certified; macOS tested
Resolusi Mac® (min):	1366x768

KONEKTOR

VGA:	1
USB 2.0 Type B:	1
3.5mm Audio In:	1
HDMI 1.4:	1
Power in:	DC Socket (Center Positive)

AUDIO

Speaker Internal:	1Watts x2
-------------------	-----------

POWER

Mode Eco (Hemat):	4.3W
Eco Mode (optimized):	4.9W
Konsumsi (khas):	5.5W
Konsumsi (maks):	6W
Tegangan:	AC 100-240V
Stand-by:	0.5W
Sumber Daya listrik:	External Power Adaptor

PERANGKAT KERAS TAMBAHAN

Slot Kunci Kensington:	1
------------------------	---

KONTROL

Kontrol Fisik:	1, 2, Up, Down, Power
Pada Tampilan Layar:	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall

OPERATING CONDITIONS

Suhu:	32°F to 104°F (0°C to 40°C)
Kelembaban (tanpa kondensasi):	20% to 90%

WALL MOUNT

VESA Compatible:	75 x 75 mm
------------------	------------

SINYAL INPUT

Frekuensi Horizontal:	30 ~ 61KHz
Frekuensi Vertikal:	56 ~ 75Hz

VIDEO INPUT

Sinkronisasi Digital:	TMD5 - HDMI (v1.4)
Analog Sync:	Separate - RGB Analog

ERGONOMIS

Miring (Maju / Mundur):	15° / 50°
-------------------------	-----------

BERAT (IMPERIAL)

Net (lbs):	2.9
Bersih Tanpa Dudukan (lbs):	2.9
Gross (lbs):	5.5

WEIGHT (METRIC)

Net (kg):	1.3
Jaring Tanpa Dudukan (kg):	1.3
Gross (kg):	2.5

DIMENSI (IMPERIAL) (WXHxD)

Kemasan (in.):	17.8 x 15.3 x 3.4
Fisik (in.):	14.9 x 9.7 x 1.5
Fisik Tanpa Berdiri (masuk):	14.9 x 9.7 x 1.5

DIMENSI (METRIK) (WXHxD)

Kemasan (mm):	453 x 389 x 86
Fisik (mm):	379 x 247 x 37
Physical Without Stand (mm):	379 x 247 x 37

UMUM

Regulasi:	CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, EAC, UkrSEPRO, UKCA, RCM, GEMS, BIS
ISI PAKET:	TD1630-3 x1, 3-pin Plug (IEC C13 / CEE22) x1, VGA Cable (Male-Male) x1, USB A/B Cable (v2.0; Male-Male) x1, Audio Cable (Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1
Daur Ulang / Pembuangan:	Please dispose of in accordance with local, state or federal laws.
Warranty:	*Warranty offered may differ from market to market